



# TYPE "3" DRIVEWAY

NO SCALE

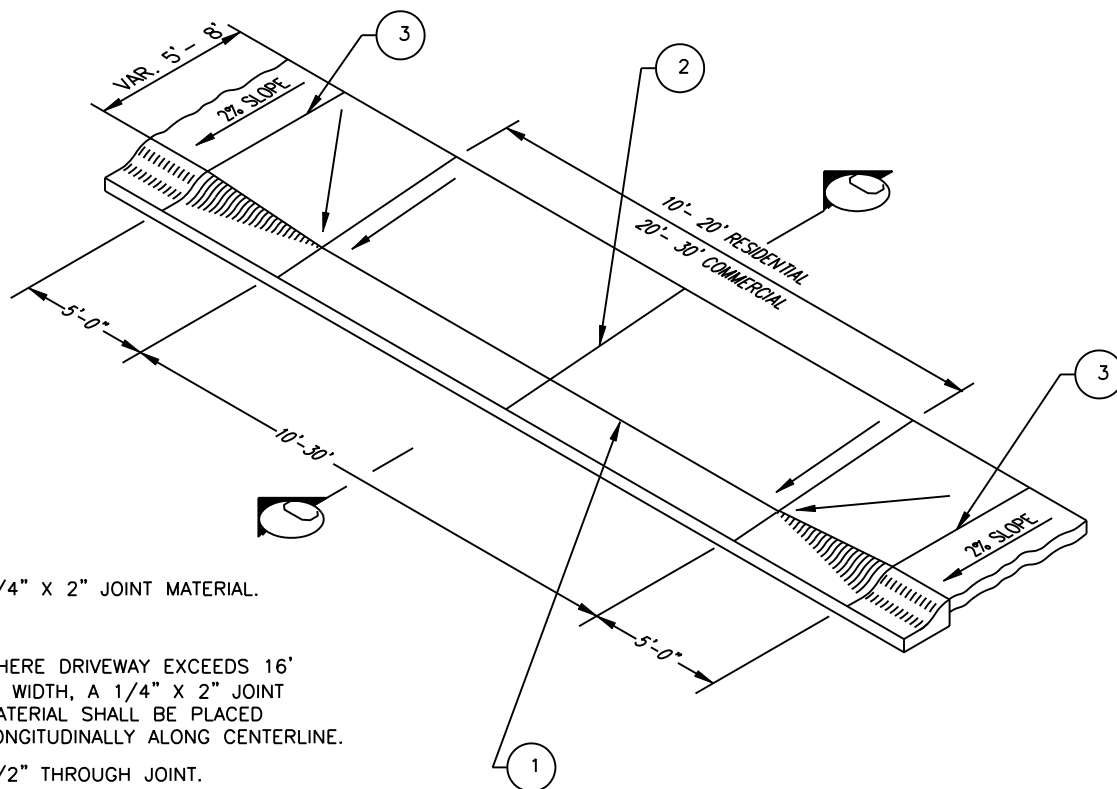

- 1 1/4" X 2" JOINT MATERIAL.
- 2 WHERE DRIVEWAY EXCEEDS 16' IN WIDTH, A 1/4" X 2" JOINT MATERIAL SHALL BE PLACED LONGITUDINALLY ALONG CENTERLINE.
- 3 1/2" THROUGH JOINT.
- 4 DRIVEWAY SURFACE SHALL RECEIVE A LIGHT BRUSH FINISH TRANSVERSE TO THE VEHICLE FLOW. (STANDARD SPEC. PAGE 3.2)
- 5 4"x4" NO. 4 GAGE WELDED WIRE MESH REQUIRED FOR COMMERCIAL DRIVEWAYS. PER AASHTO M55

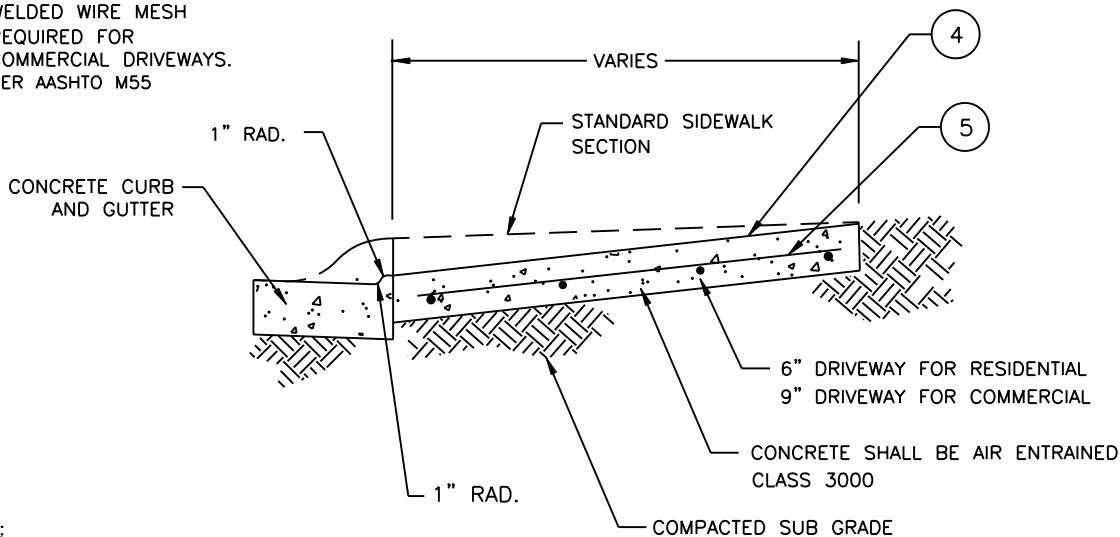

## NOTES:

1. PROPOSED LOCATION OF TYPE "3" DRIVEWAY SHALL BE REVIEWED AND APPROVED BY THE CITY ENGINEER PRIOR TO INSTALLATION.

## SECTION C-C

APPROVED: RICHARD H. BARTHOL  
REV. DATE: JULY 1, 2000

ENGINEERING DIVISION



STANDARD DETAILS

## TYPE "3" DRIVEWAY

FILE SD307.DWG DRAWING NO. 307